






BI-ENERGY



Diesel
14,7 kW







Single-phase
Electric motor
230VAC - 2,2 kW

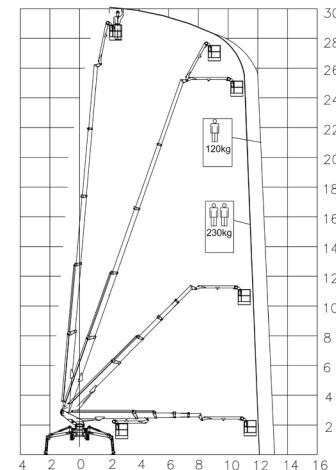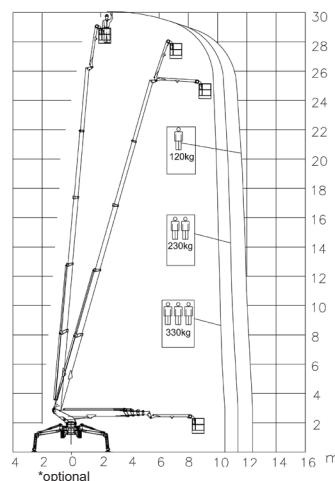

10,5 m	11,4 m	12,4 m	7,5 m
330 kg*	230 kg	120 kg	120/230 kg
L1	L2	W1	W2
4927 mm	6436 mm	4791 mm	3828 mm
W3			
2865 mm			

12 m	13 m	8 m
230 kg	120 kg	230/120 kg
L1	L2	W1
4927 mm	6436 mm	4791 mm
W2		
3828 mm		
W3		
2865 mm		

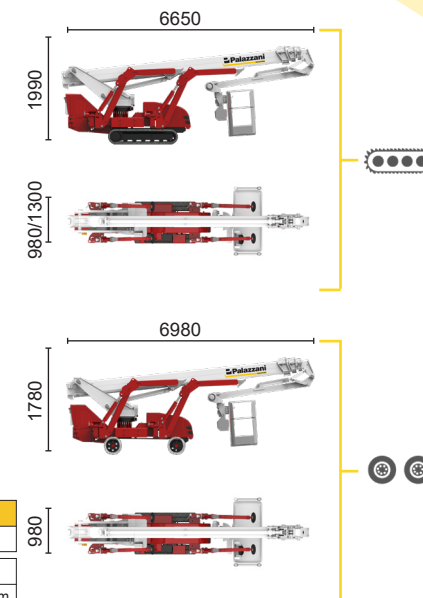

TSJ 30.1/C		30 m	13 m	330 kg*	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	42%	1,2 km/h	4580 kg	29 kN	1,94 kN/m2	3,83 kN/m2
TSJ 30.1/R		30 m	13 m	330 kg*	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	29%	1,2 km/h	4840 kg	29 kN	2,05 kN/m2	3,85 kN/m2

Available power options:

BI-ENERGY (DIESEL+AC)

ECO (AC+BATTERY)

HYBRID (DIESEL+AC+BATTERY)

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



Palazzani
INDUSTRIE

QUALITY SYSTEM
CERTIFIED BY BUREAU VERITAS
= ISO 9001 =

NC 828 A 22







ECO




Single-phase
Electric motor
230VAC - 5,5 kW







Lithium iron
phosphate battery
LiFePO4
48V - 375 Ah

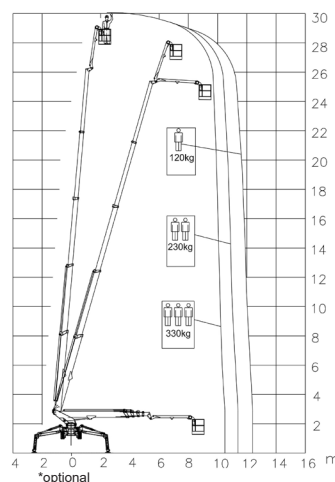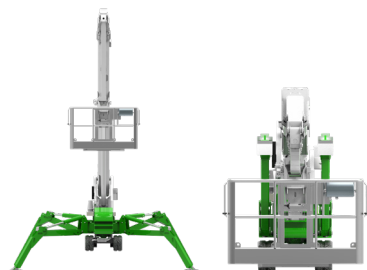

10,5 m	11,4 m	12,4 m	7,5 m
330 kg*	230 kg	120 kg	120/230 kg
L1	L2	W1	W2
4927 mm	6436 mm	4791 mm	3828 mm
W3			
2865 mm			

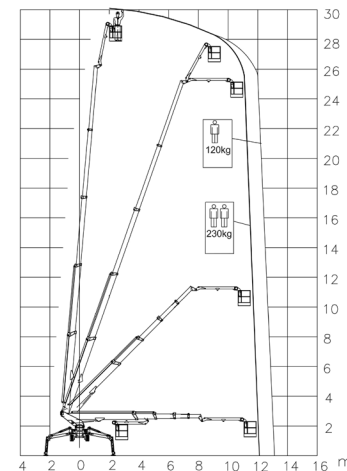

12 m	13 m	8 m
230 kg	120 kg	230/120 kg
L1	L2	W1
4927 mm	6436 mm	4791 mm
W2	W3	
3828 mm	2865 mm	

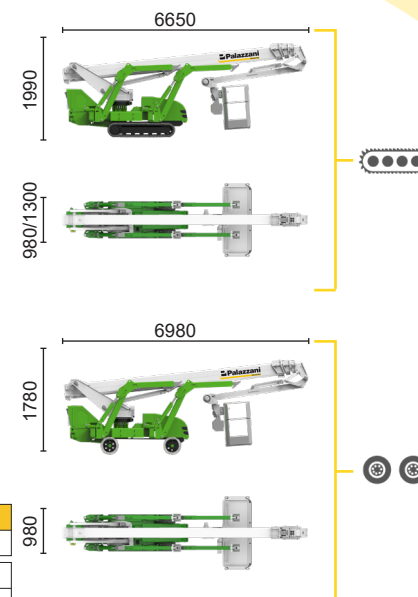

TSJ 30.1/C	30 m	13 m	330 kg*	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	42%	1,2 km/h	4580 kg	29 kN	1,94 kN/m2	3,83 kN/m2
TSJ 30.1/R	30 m	13 m	330 kg*	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	29%	1,2 km/h	4840 kg	29 kN	2,05 kN/m2	3,85 kN/m2

Available power options:

BI-ENERGY (DIESEL+AC)

ECO (AC+BATTERY)

HYBRID (DIESEL+AC+BATTERY)

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



Palazzani
INDUSTRIE

QUALITY SYSTEM
CERTIFIED BY BUREAU VERITAS
= ISO 9001 =

NC 830 A 22



HYBRID²





Diesel
14,7 kW




Single-phase
Electric motor
230VAC - 5,5 kW







Lithium iron
phosphate battery
LiFePO4
48V - 210 Ah

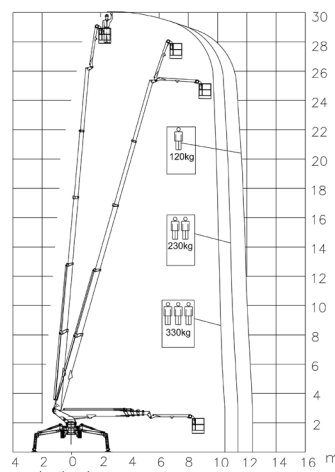

10,5 m	11,4 m	12,4 m	7,5 m
330 kg*	230 kg	120 kg	120/230 kg
L1	L2	W1	W2
4927 mm	6436 mm	4791 mm	3828 mm
2865 mm			

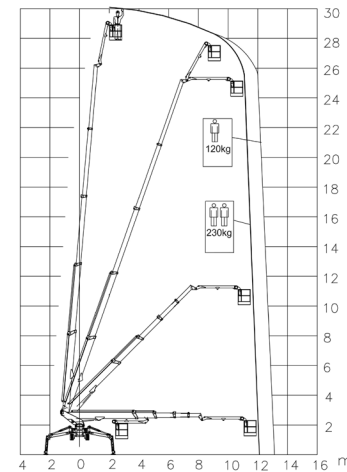

12 m	13 m	8 m
230 kg	120 kg	230/120 kg
L1	L2	W1
4927 mm	6436 mm	4791 mm
3828 mm	2865 mm	

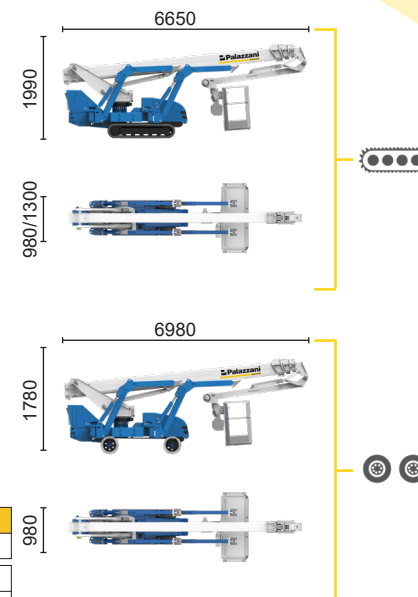

TSJ 30.1/C		30 m	13 m	330 kg*	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	42%	1,8 km/h	4940 kg	29 kN	2,09 kN/m2	4,13 kN/m2
TSJ 30.1/R		30 m	13 m	330 kg*	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	29%	1,4 km/h	5040 kg	29 kN	2,14 kN/m2	4,01 kN/m2

Available power options:

BI-ENERGY (DIESEL+AC)

ECO (AC+BATTERY)

HYBRID² (DIESEL+AC+BATTERY)

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



Palazzani
INDUSTRIE

QUALITY SYSTEM
CERTIFIED BY BUREAU VERITAS
= ISO 9001 =

NC 832 A 22

